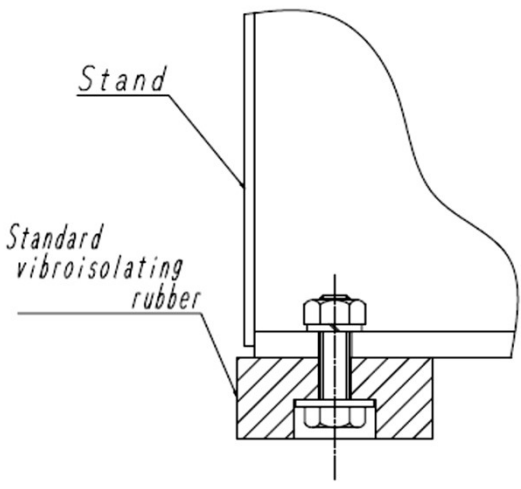
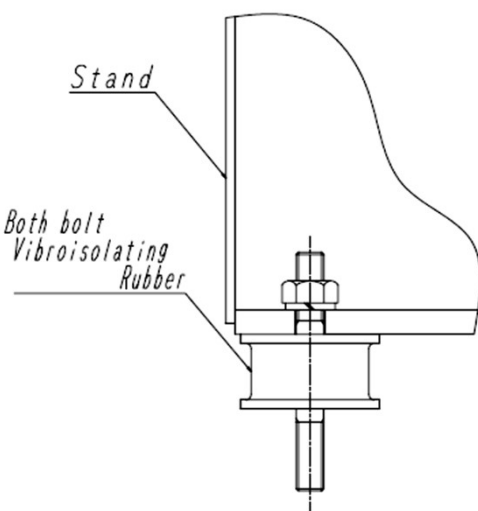



KOWA Vibrating Sifter

■ How to use the Both bolt vibroisolating rubber

Before	After
 When the machine is delivered, the standard vibroisolating rubber is used.	 Please replace the standard type to both bolt type.

■ Both bolt vibroisolating rubber (KURASHIKI)

Type・Size	Unit type	Mounting Pitch	Quantity
KA-50 D:50 H:27 L:30(※1) A:25 d:M10	F:400・500	P.C.D.450	4
	G/I:400・500	P.C.D.480	4
	F/G/I/L:700・800 F/G/I/L:1000 I:1200	P.C.D.755	8
KA-80 D:80 H:40 L(A):45 d:M12	F/G/L:1200 F/G:1500	P.C.D.965	6 ※2

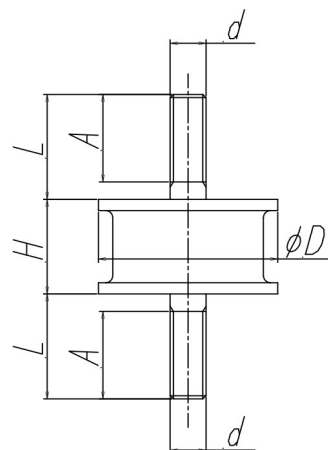

※1 Please install the short bolt under V-pulley

※2 Please confirm the installation point by a drawing

・Torques M10: 18~25(N・m) 、M12: 31~45(N・m)

For installation precautions, please refer to the “Precautions for Use” issued by manufacturer of the anti-vibration rubber. (Refer to the URL below)

<https://sanki.kuraka.co.jp/products/search.html?c1=&q=KA-50&t5=1>